

INTERNATIONAL COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark
Office
(Box PCT)
Crystal Plaza 2
Washington, DC 20231
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 24 June 1999 (24.06.99)	Applicant's or agent's file reference 2970898PC/su
International application No. PCT/FI98/00724	Priority date (day/month/year) 19 September 1997 (19.09.97)
International filing date (day/month/year) 15 September 1998 (15.09.98)	
Applicant TARNANEN, Teemu et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:
16 April 1999 (16.04.99)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<p>The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p> <p>Facsimile No.: (41-22) 740.14.35</p>	<p>Authorized officer</p> <p>F. Baechler</p> <p>Telephone No.: (41-22) 338.83.38</p>
--	--

PCT

From the INTERNATIONAL BUREAU

**NOTIFICATION OF THE RECORDING
 OF A CHANGE**

(PCT Rule 92bis.1 and
 Administrative Instructions, Section 422)

To:

KOLSTER OY AB
 Iso Roobertinkatu 23
 P.O. Box 148
 FIN-00121 Helsinki
 FINLANDE

Date of mailing (day/month/year) 10 November 1999 (10.11.99)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference 2970898PC/su	
International application No. PCT/FI98/00724	
	International filing date (day/month/year) 15 September 1998 (15.09.98)

1. The following indications appeared on record concerning:									
<input checked="" type="checkbox"/> the applicant	<input type="checkbox"/> the inventor								
<input type="checkbox"/> the agent	<input type="checkbox"/> the common representative								
Name and Address NOKIA TELECOMMUNICATIONS OY Keilalahdentie 4 FIN-02150 Espoo Finland	<table border="1"> <tr> <td>State of Nationality FI</td> <td>State of Residence FI</td> </tr> <tr> <td colspan="2">Telephone No.</td> </tr> <tr> <td colspan="2">Facsimile No.</td> </tr> <tr> <td colspan="2">Teleprinter No.</td> </tr> </table>	State of Nationality FI	State of Residence FI	Telephone No.		Facsimile No.		Teleprinter No.	
State of Nationality FI	State of Residence FI								
Telephone No.									
Facsimile No.									
Teleprinter No.									
2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:									
<input type="checkbox"/> the person	<input checked="" type="checkbox"/> the name								
<input type="checkbox"/> the address	<input type="checkbox"/> the nationality								
<input type="checkbox"/> the residence									
Name and Address NOKIA NETWORKS OY Keilalahdentie 4 FIN-02150 Espoo Finland	<table border="1"> <tr> <td>State of Nationality FI</td> <td>State of Residence FI</td> </tr> <tr> <td colspan="2">Telephone No.</td> </tr> <tr> <td colspan="2">Facsimile No.</td> </tr> <tr> <td colspan="2">Teleprinter No.</td> </tr> </table>	State of Nationality FI	State of Residence FI	Telephone No.		Facsimile No.		Teleprinter No.	
State of Nationality FI	State of Residence FI								
Telephone No.									
Facsimile No.									
Teleprinter No.									
3. Further observations, if necessary:									
4. A copy of this notification has been sent to:									
<input checked="" type="checkbox"/> the receiving Office	<input type="checkbox"/> the designated Offices concerned								
<input type="checkbox"/> the International Searching Authority	<input checked="" type="checkbox"/> the elected Offices concerned								
<input type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:								

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Aino Metcalfe Telephone No.: (41-22) 338.83.38
---	---

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

REC'D 27 OCT 1999

PCT

17

Applicant's or agent's file reference 2970898PC/nu	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/FI98/00724	International filing date (day/month/year) 15.09.1998	Priority date (day/month/year) 19.09.1997
International Patent Classification (IPC) or national classification and IPC ₆ H 04 Q 7/38, H 04 L 12/28		
Applicant Nokia Telecommunications OY et al		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 4 sheets, including this cover sheet.

☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of _____ sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 16.04.1999	Date of completion of this report 23.09.1999
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. 08-667 72 88	Authorized officer Malin Gullstrand/cs Telephone No. 08-782 25 00

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/FI98/00724

I. Basis of the report

1. This report has been drawn on the basis of *(Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.)*:

- ☒ the international application as originally filed.
- ☐ the description, pages _____, as originally filed,
 pages _____, filed with the demand,
 pages _____, filed with the letter of _____,
 pages _____, filed with the letter of _____.
- ☐ the claims, Nos. _____, as originally filed,
 Nos. _____, as amended under Article 19,
 Nos. _____, filed with the demand,
 Nos. _____, filed with the letter of _____,
 Nos. _____, filed with the letter of _____.
- ☐ the drawings, sheets/fig _____, as originally filed,
 sheets/fig _____, filed with the demand
 sheets/fig _____, filed with the letter of _____,
 sheets/fig _____, filed with the letter of _____.

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheets/fig _____

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the supplemental Box (Rule 70.2(c)).

4. Additional observations, if necessary:

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/FI98/00724

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**1. Statement**

Novelty (N)	Claims	<u>1-19</u>	YES
	Claims		NO
Inventive step (IS)	Claims	<u>1-19</u>	YES
	Claims		NO
Industrial applicability (IA)	Claims	<u>1-19</u>	YES
	Claims		NO

2. Citations and explanations

The claimed invention concerns a method of updating Internet access point information in the terminal equipment of a digital mobile communication system.

Internet access point (IAP) settings needed for establishing a connection are stored in the mobile station (MS). When an MS roams, the closest point may change, and IAP settings must be updated. The invention comprises dividing the mobile communications system into IAP areas that are given preferred IAP's. An IAP area may be a mobile communications network.

The following documents are cited in the International Search Report:

D1: US5533026

D2: US509580

D3: EP0696117, A2

D4: EP0695058, A2

The D1 document discloses a message routing system for shared communication media networks.

The D2 document discloses access point switching for mobile wireless network nodes.

The D3 document discloses access point tracking for mobile network nodes.

The D4 document discloses a communication system including a method and an apparatus for maintaining communications with a mobile terminal.

The documents D1-D4 differs from the invention claimed in claims 1-19, in that each one of the cited documents relate to the mobility management of mobile stations of wireless nodes in a communication network, in order to enable routing of data packets to the current location of the mobile station. For this purpose, the address/location is updated in the nodes of a communication system while the mobile station roams in the system.

.../...

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/FI98/00724

Supplemental Box

(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: V.

The invention on the other hand is not related to the mobility management of the mobile station, but to a method and means that enable the mobile station to select the Internet access point of the subscribed Internet service provider, while roaming.

Therefore, D1-D4 does not reveal anything that may imply a lack of novelty or inventive step in the claimed invention.

The invention claimed in claims 1-19 has industrial applicability.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : H04Q 7/22		A2	(11) International Publication Number: WO 99/16263
			(43) International Publication Date: 1 April 1999 (01.04.99)
(21) International Application Number: PCT/FI98/00724		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 15 September 1998 (15.09.98)			
(30) Priority Data: 973737 19 September 1997 (19.09.97) FI			
(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).			
(72) Inventors; and (75) Inventors/Applicants (for US only): TARNANEN, Teemu [FI/FI]; Kaskipuunkaari 5 C 6, FIN-02340 Espoo (FI). MOSLEMIE, Abbas [FI/FI]; Pajalahdentie 4 A 9, FIN-00200 Helsinki (FI).			
(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		Published Without international search report and to be republished upon receipt of that report.	

(54) Title: UPDATING OF INTERNET ACCESS POINT SETTINGS IN A MOBILE COMMUNICATION SYSTEM

(57) Abstract

A digital mobile communication system is provided with a facility by means of which it can establish a connection to the Internet network (12) via an Internet access point (14, 15). IAP settings needed for establishing a connection are stored in a mobile station (MS). When a mobile station (MS) roams, the closest point may, however, change, and IAP settings should be updated in the mobile station (MS). The invention comprises dividing the mobile communication system into IAP areas, which are given preferred IAPs. An IAP area may be e.g. a mobile communication network (11, 17). Mobile communication networks broadcast system information on the basis of which a mobile station may detect that the IAP area has changed and start a procedure for updating IAP settings.

Updating may comprise retrieval of IAP settings from a special server (13) in the network maintained by an Internet service provider. Retrieval can be done e.g. via a short message service center (10). In one embodiment the mobile communication network broadcasts messages giving recommended IAP settings to mobile stations.

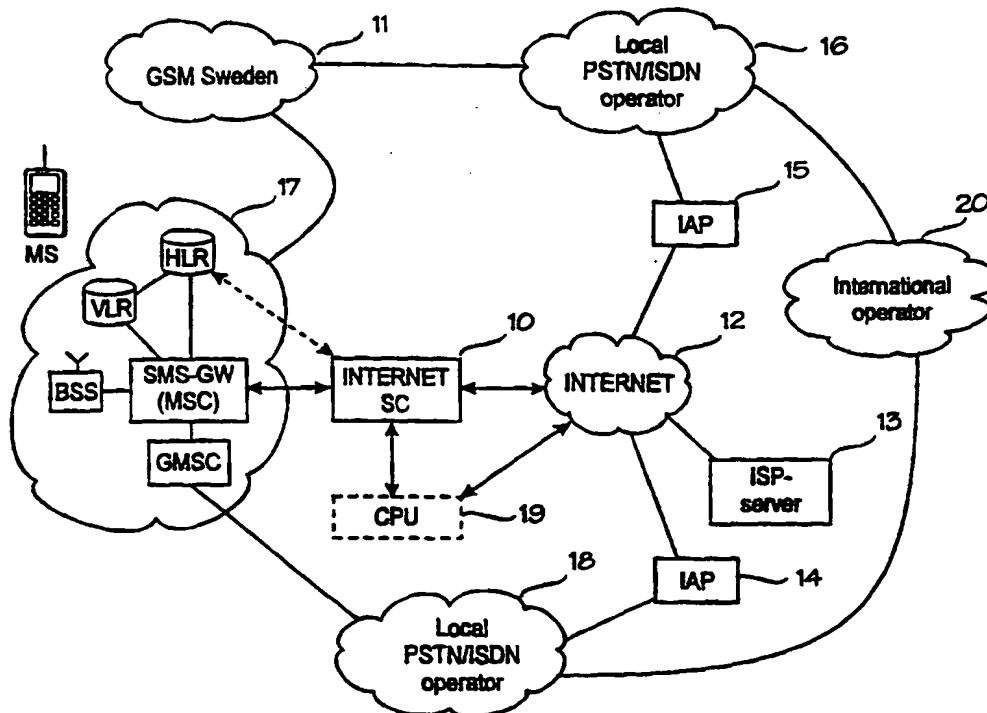

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

UPDATING OF INTERNET ACCESS POINT SETTINGS IN A MOBILE COMMUNICATION SYSTEM

FIELD OF THE INVENTION

The invention relates generally to digital mobile communication
5 systems and more particularly to supporting roaming in connection with
Internet services in a mobile communication system.

BACKGROUND OF THE INVENTION

Mobile communication systems refer, in general, to different
telecommunication systems providing personal wireless data transmission
10 while subscribers roam the system area. A typical mobile communication
system is the public land mobile network PLMN.

Besides conventional speech transmission, digital mobile
communication systems provide a plurality of services: short messages,
facsimiles, data transmission, etc. Of these, the data transmission service, in
15 particular, provides a mobile subscriber a chance of wireless access to nearly
all data services of fixed networks.

The use of the TCP/IP (Transmission Control Protocol / Internet
Protocol) data network, i.e. the Internet network, in fixed networks has
increased very rapidly. As is well known, the Internet network actually
20 comprises a large number of smaller interconnected TCP/IP networks. The
Internet network has a number of TCP/IP application protocols available for
users. From the end user's point of view the most important ones are the
following:

- TELNET. This protocol allows the user's terminal (or user
25 application program) in one computer to communicate with an application
process, e.g. a word processing program run in a remote computer, in another
computer via the Internet network as if the user's terminal were directly
connected to the other computer;
- FTP (File Transfer Protocol). This protocol allows the user's
30 terminal (or user application program) to access a remote file system and to
interact with it;
- SMTP. This protocol provides a network-wide mail transfer service
between e-mail systems of different computers;
- WWW (World Wide Web). The WWW system consists of servers
35 in the Internet network and customer programs used by these servers, called

WWW browsers. The information in the WWW servers is arranged into pages which are the basic units of the WWW technique, as whole pages are always transferred between a server and a browser. In addition to text, the page may also contain graphics and various other file types, such as voice and video.

- 5 The pages used by the WWW technique are described with the HTML language (Hyper Text Mark-up Language). Information on text format, graphics, etc. is coded among the actual text contents by HTML tags. The browser program uses these tags to give a WWW page the desired format.

- Internet applications are used for connecting to services in the
- 10 Internet network. Before a user can connect to the Internet, he has to have a contract with an Internet service provider ISP, who provides access to the Internet via one or more Internet access points IAP. The ISP may be e.g. a commercial operator (as EUNET in Europe), university or private company. Usually, the IAP is a server to which the user has access from a telephone in
- 15 the fixed network or from a mobile telephone by making a modem call (or a data call) to a certain IAP access number.

- Through the data transmission services of mobile communication systems, the numerous information sources of the Internet network are, in principle, available to mobile subscribers, too. However, the use of data
- 20 transmission services typically requires a mobile station provided with data transmission properties, and a computer connected thereto. At present, mobile stations including an integrated computer, such as the Nokia Communicator 9000, are available. This also has built-in facilities for connecting to the Internet network.

- 25 An ordinary subscriber of the fixed network usually needs only one IAP, the one that is closest to him, and thus has the lowest call costs. A mobile subscriber may, however, roam within a large area in one country and even between different countries. If the mobile subscriber always uses the same IAP (home IAP) to connect to the Internet, call costs (data transmission costs)
- 30 may increase considerably. For example, if the subscriber is roaming in Germany and his home IAP is in Finland, the use of Internet services via the home IAP entails an international call between Germany and Finland. To optimize data communication costs mobile subscribers would like to use the local IAP regardless of their location. The subscriber's Internet service provider
- 35 ISP (as EUNET) may have numerous IAPs available all around the world. As

regards a mobile subscriber, selecting the best possible IAP easily and, if possible, automatically may be problematic.

According to one method of the prior art, the subscriber manually reconfigures/changes/establishes a new IAP when he is in a new area. To carry out this the subscriber needs a list of available IAPs telling how to set the correct IAP depending on the location of the subscriber. Manual configuration is, however, troublesome and error prone. Furthermore, the lists would not be up to date in the long run. For example, the Nokia Communicator 9000 is provided with a user interface supporting such an IAP list. The list may include e.g. the following information: 1) service provider's name; 2) telephone number of the IAP; 3) user's name (used in PPP authentication, if necessary); 4) password (used in PPP authentication, if necessary); 5) subscriber's own IP address; 6) IP addresses of the primary and secondary name servers.

In the case of the Nokia Communicator 9000 the service provider ISP is able to configure an IAP with a special short message, called SIAP SMS (Set Internet Access Point Short Message). This special short message carries out all necessary IAP settings in the mobile station and adds a new IAP to the list. The mobile station, however, asks the user to confirm the change before any action is taken. An advantage of this semi-automatic short message updating is that the user does not need to update information manually, which also eliminates errors. If this feature were used for supporting roaming, the user would need to call the service provider's customer service and to request information on the best IAP with respect to his location in a SIAP short message. From the user's point of view this is troublesome and may cause a considerable amount of extra work to the service provider, especially when the number of subscribers is large. Alternatively, the ISP could send a SIAP short message(s) to all subscribers when an IAP configuration has changed in some part of the world. This is, however, an inconvenient and expensive solution both for users and Internet service providers.

DISCLOSURE OF THE INVENTION

The object of the present invention is to provide automatic selection of a local Internet access point for mobile subscribers as easily as possible during roaming.

This is achieved with a method of updating information on an Internet access point in the terminal equipment of a digital mobile

communication system, which is capable of establishing a connection to the Internet via the mobile communication system and a group of Internet access points. The method is characterized in that it comprises the steps of

storing settings of Internet access points that were used last time to
5 access the Internet in the terminal equipment,

storing system information on the mobile communication network or on part of the mobile communication network that was used last time to access the Internet;

receiving broadcast system information on the mobile
10 communication network of the current location area of the terminal equipment or on part of the mobile communication network,

comparing said received system information with said stored system information,

starting a procedure for updating the stored Internet access point
15 settings of the terminal equipment with Internet access point settings recommended for the currently used mobile communications network or for part of the mobile communication network, if it is noted on the basis of said stored and received system information that the mobile communication network or part of the mobile communication network has changed.

20 The invention also relates to a server as claimed in claim 8, a short message service centre as claimed in claim 9, terminal equipment as claimed in claim 13 and a mobile communication system as claimed in claim 19.

According to the invention, the mobile communication system is divided into areas which are given recommended or preferred Internet access
25 points (IAP). In this application, these areas are referred to as IAP areas. Typically, the recommended or preferred IAP is the Internet service provider's (ISP) local IAP, to which data call costs from a mobile station are the lowest. In principle, the division of IAP areas may be a division of any kind. For example, each country or each mobile telephone operator's network may form an IAP
30 area of its own. Alternatively, each mobile communication network can be divided into smaller IAP areas, e.g. according to the location area configuration of the network. When the division of IAP areas has been agreed on, the ISP only needs to name preferred IAPs for each IAP area. Naturally, different Internet service providers ISP have different IAPs in the same IAP
35 area. According to the basic idea of the invention, a mobile station roaming

within the system tries to select the preferred IAP of each IAP area to access the Internet. This can be called IAP roaming.

For IAP roaming, settings of the last used or updated IAP and system information identifying the IAP area (the mobile communication
5 network or part of the mobile communication network) where the mobile station was located during the last Internet transaction or IAP updating are stored in the mobile station. The mobile station compares the system information broadcast by the serving cell with the above-mentioned stored system information. If it is possible to conclude on the basis of the comparison
10 that the IAP area has changed, the mobile station updates the stored IAP settings with IAP settings which it receives from or retrieves via the mobile communication network and which are suitable for the IAP area in question. In a preferred embodiment of the invention, the mobile station retrieves IAP settings suitable for its location from a server, data base or the like maintained
15 by the ISP. In an IAP request the mobile station indicates its location (IAP area) by means of certain system information, on the basis of which the ISP server selects IAP settings suitable for the location, and these settings are sent to the mobile station in response. In a second embodiment of the invention, preferred IAP settings are broadcast to mobile stations within an IAP
20 area in broadcast messages, by means of which the mobile station can update IAP settings, if necessary. This allows to avoid a separate retrieval procedure, but on the other hand, messages additionally load both the network and mobile stations. Furthermore, message broadcast services are not available everywhere, which may limit the scope of IAP roaming of the invention.

25 According to the preferred embodiment of the invention, the mobile station checks whether updating of IAP settings is necessary only when a new Internet transaction is initiated, i.e. the IAP is needed. This allows to avoid unnecessary updating when the mobile station roams in a network. This is advantageous especially in the preferred embodiment of the invention, in
30 which IAP settings are retrieved from the ISP server. On the other hand, this may cause delay (even 10-15 s) when the first Internet data call is set up in a new area. In an embodiment in which new IAP settings are received in broadcast messages the delay is smaller. In one embodiment of the invention, the mobile station updates IAP settings each time it notes that an IAP area has
35 changed. Thus IAP settings are always up to date, and there is no delay when the first Internet call is set up.

The preferred embodiment of the invention comprises a special message service centre, which either directly or via a data network is connected to equipment maintaining IAP settings of IAP areas or to an application referred to as an ISP server in this description. The mobile station
5 requests IAP settings by sending a special "request Internet access point" message, i.e. a RIAP message. In the preferred embodiment of the invention, the RIAP message also includes system information, which identifies the current IAP area of the mobile station. It is also possible that the service centre has information on the IAP area or deduces the information itself. Then the
10 service centre requests IAP settings from the ISP server according to the protocol required by the interface between them or by the data network. This request may include system information, which identifies the IAP area and by means of which the ISP server selects the IAP settings suitable for the location of the mobile station. These IAP settings are transmitted to the service centre,
15 which forwards them to the mobile station in a special "set Internet access point" message, i.e. a SIAP message. The mobile station updates the stored IAP settings with the IAP settings it receives in a SIAP message.

In one embodiment of the invention, the message service centre retrieves unclassified IAP settings of IAP areas from an ISP server and selects
20 the settings that are suitable for the location of the mobile station. For example, when the ISP server is in the Internet network, the service centre may retrieve an entire WWW page including IAP areas and their preferred IAP settings. From these the service centre selects the IAP settings suitable for the mobile station and sends them to the mobile station in a SIAP message. In this
25 embodiment the Internet service provider only needs to maintain a WWW page.

Compared with the prior art, the present invention has several advantages. As regards the user, the IAP roaming of the invention is a simple, automatic procedure, which guarantees up-to-date IAP settings and low call
30 costs. As regards the Internet service provider ISP, the maintenance of necessary services at the server requires only a minimal amount of work and minimal costs.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following, preferred embodiments of the invention will be
35 described with reference to the accompanying drawings, in which

Figure 1 is a system chart illustrating two mobile communication networks, local and international public switched telephone networks, the Internet network, Internet access points, an ISP server and Internet short message service centre,

5 Figures 2 and 3 are flow charts illustrating IAP roaming and updating of IAP settings carried out by a mobile station,

Figure 4 is a signalling chart illustrating retrieval of IAP settings from an ISP server,

Figure 5 is a flow chart illustrating operation of the ISP server,

10 Figure 6 is a flow chart illustrating operation of a service centre SC,

Figure 7 is a flow chart illustrating operation of the MS when IAP settings are retrieved from the network,

Figure 8 is a flow chart illustrating operation of the MS when IAP settings are received in broadcast short messages.

15 PREFERRED EMBODIMENTS OF THE INVENTION

The present invention can be applied to all mobile communication systems which support circuit-switched speech and data services, and in which terminal equipment can establish a data connection to the Internet network via special Internet access points. The invention is particularly suitable
20 for mobile communication systems having a short message service. In the present application, short message service generally refers to the transfer of a short text message of any kind between a mobile station and a special short message service unit without the need to set up a point-to-point connection. This is why the transfer of a short message may take place even when in the
25 mobile station there is a speech or data call in progress on a circuit-switched point-to-point connection. Short message transfer is limited to one message, i.e. the transfer of one message constitutes the whole transaction. Thus, short message service is totally different from packet-switched data transmission. One example of short message service is the short message service of the
30 GSM system defined in recommendation ETSI GSM 03.40. Another example of message broadcast appropriate for the invention is the USSD (Unstructured Supplementary Service Data) defined in recommendation ETSI GSM 02.90, 03.90 and 04.90.

In the following the invention will be described in connection with
35 the digital GSM (Global System for Mobile Communication). Regarding the invention, the operation and structure of the mobile communication system are

not relevant, and hence they are described only to a degree that will assist in comprehending short message service. As to a more precise description of the GSM system, reference is made to the GSM recommendations and the publication "The GSM System for Mobile Communications", M. Mouly & M. Pautet, Palaiseau, France, 1992, ISBN:2-9507190-0-7.

Figure 1 illustrates two GSM mobile communication networks 11 and 17. GSM network 17 is located in Finland, and GSM network 11 in Sweden. In the GSM network a mobile switching centre MSC switches incoming and outgoing calls. It also performs tasks typical of mobile telephone traffic, such as subscriber location management, in co-operation with the network subscriber registers VLR and HLR. The HLR is a subscriber's home register for permanent storage of subscriber data. The visitor location register VLR is a local register to which the subscriber data is copied from the HLR when a mobile subscriber visits the area of the VLR. Mobile stations MS communicate with the centre MSC via base station systems BSS. The BSS consists of a base station controller BSC and base stations BTS, i.e. fixed radio transceivers via which the mobile stations MS communicate with the mobile communication network over the radio path.

The MSC which functions as a gateway to another network (e.g. PSTN, ISDN, public data network PSDN) is called a gateway MSC, i.e. GMSC. In Figure 1 GSM networks 11 and 17 are shown as connected to local PSTN/ISDN networks 16 and 18, respectively. PSTN/ISDN networks 16 and 18 are connected to each other and to PSTN/ISDN networks in other countries by means of an international transmission network 20.

The Internet network 12 is a world wide group of networks in accordance with the TCP/IP protocol. The Internet network is accessed from other telecommunication networks, e.g. PSTN/ISDN, via Internet access points. The Internet access service provider ISP may be e.g. a commercial operator, such as EUNET, university or private company. The ISP may have a separate IAP for each country, e.g. IAP 14 (EUNET Finland) and IAP 16 (EUNET Sweden) in Figure 1. Typically, the IAP is a server which the user can access from an ordinary subscription in the fixed network or from a mobile station by making an ISDN/PSTN modem call (or a data call in the mobile communication network) to a certain number, called an IAP access number.

Through the data transmission services of mobile communication systems, the numerous information sources of the Internet network are, in

principle, available to mobile subscribers, too. However, the use of data transmission services typically requires a mobile station provided with data transmission properties, and a computer connected thereto. At present, mobile stations including an integrated computer, such as the Nokia Communicator 5 9000, are available. This also has built-in facilities for connecting to the Internet network. In the following description it is assumed that the mobile station MS is, by way of example, an integrated terminal equipment similar to the Nokia Communicator.

As was stated above, settings of at least one IAP are stored in the 10 MS, and the MS makes a data call to the IAP for Internet transaction on the basis of these settings. IAP settings may vary in different applications, but they typically include at least the IAP access number and the service provider's (ISP) name. It is assumed that the home network of the MS is GSM 17 (Finland) and its home IAP is IAP 14 in Finland. For example, when the MS is 15 roaming in the GSM network 11 in Sweden, it would be most advantageous for the subscriber to use the local IAP 15 instead of the home IAP to avoid costs of an international call. As was described in greater detail in the introductory part of the application, a problem in this case is how the MS or the subscriber knows the most suitable IAP for each location.

20 According to the invention, the mobile communication system is divided into areas, which are given recommended or preferred Internet access points (IAP). In the present application, these areas are referred to as IAP areas. In Figure 1 GSM network 17 forms one IAP area, and GSM network 11 another. The division of IAP areas may in principle be a division of any kind. 25 Each Internet service provider ISP may name one or more preferred IAPs for an IAP area. In the example in Figure 1 it is assumed that one ISP (e.g. EUNET) has as the preferred IAP of GSM network 17 IAP 14 (EUNET Finland), and as the preferred IAP of GSM network 11 IAP 15 (EUNET Sweden). According to the basic idea of the invention, a mobile station roaming in the system detects 30 the change of the IAP area on the basis of system information broadcast by the serving base station and updates IAP settings so as to be able to establish an Internet call via the preferred IAP of the new IAP area. This procedure is described in greater detail with reference to flow charts shown in Figures 2 and 3, which illustrate operation of the MS in IAP roaming according to the 35 invention. System information may be any information which is sent by the network and which can be used for identifying a network or part of it, e.g.

country code, operator name, operator code, network name, network code and location area identifier.

In the embodiment in Figure 2, checking of the IAP area and a possible updating of IAP settings are carried out only when the user has initiated set-up of a new Internet call (Internet transaction) in the manner defined for the terminal equipment MS. Thus it is possible to avoid unnecessary updatings when the MS roams, but does not use an Internet service. On the other hand, when the first Internet call is set up in a new IAP area, delay may occur. At first, it is assumed that the settings of the IAP used in the previous Internet call as well as system information identifying the used IAP area (mobile communication network or part of the mobile communication network) are stored in the memory of the MS. When the user initiates a new Internet transaction (step 21), the MS receives system information broadcast by the serving base station on the control channel (step 22). The MS compares the received system information with the stored system information of the IAP area used in the previous call to check whether the IAP area has changed (steps 23 and 24). If the IAP area has not changed, the MS does not need to change IAP settings, but it sets up an Internet call on the basis of old IAP settings via the old IAP (step 25). If the change of the IAP area is noted in step 24, the MS updates its IAP settings according to the new IAP area (step 26), as will be explained in greater detail below. New IAP settings and system information on the new IAP area are stored in the MS (step 26). After this the MS sets up an Internet call according to new IAP settings via the new IAP (step 27).

In the embodiment in Figure 3, the MS updates IAP settings each time it notes that the IAP area changes. This embodiment guarantees up-to-date IAP settings and fast set-up of an Internet call. On the other hand, frequent updatings may load both the MS and the network. At first, it is assumed that settings of the IAP used in the previous Internet call or updated last as well as system information identifying the used IAP area (mobile communication network or part of it) are stored in the memory of the MS. The MS continuously receives system information broadcast by the serving base station (step 31). At appropriate points, e.g. when changing the cell, location area or network, the MS compares the received system information with the stored information to check whether the IAP area has changed (steps 32 and 33). If the IAP area has not changed, the MS does not need to alter IAP

settings. If the change of the IAP area is noted in step 33, the MS updates its IAP settings according to the new IAP area (step 34), as will be explained in greater detail below. New IAP settings and system information on the new IAP area are stored in the MS (step 34).

5 The actual updating stages (26 and 34 in Figures 2 and 3) of IAP settings can be realised in several alternative ways. In the preferred embodiment of the invention, which will in the following be described with reference to Figures 4-6, the MS retrieves new IAP settings from an equipment, application, data base, server or the like on the network side,
10 generally referred to as a server herein. A server is advantageously maintained by the ISP and located outside the mobile communication network. In principle, retrieval of IAP settings can be carried out by setting up a data call directly to the server. In the preferred embodiment of the invention the retrieval is, however, carried out by utilizing short message service, such as the SMS or
15 USSD of the GSM.

 The European Telecommunications Standards Institute (ETSI) standard GSM 03.40 describes the point-to-point (PP) short message service (SMS) of the GSM system. The SMS of the GSM network offers means for transferring short messages with limited length (160 ASCII characters)
20 between mobile stations MS and a short message service centre SC 10 which is outside the GSM network 11. Mobile originated (MO) and mobile terminated (MT) short message transmissions are defined as separate services. MO short messages are transferred from the MS to the service centre SC. These short messages may be destined for other mobile station users or for subscribers on
25 a fixed network. MT short messages are transferred from the service centre SC to the MS. These short messages may have arrived at the service centre SC from other mobile station users or from other sources. The protocol employed between the SC and the MS is called SM-TP (Short Message Transport Protocol).

30 The service centre SC is connected to the mobile communication network via a certain MSC, called the SMS-GatewayMSC when MT short messages are involved, and SMS-InterworkingMSC when MO short messages are involved. The present application uses a common name SMS-Gateway (SMS-GW). The SMS-GW relays short messages between a MS and the SC
35 and performs the HLR (and VLR) inquiries needed for an MT message in a call. The service centre SC is given a dedicated ISDN number in the number

space of the GSM network, and the MS uses the ISDN number for addressing a short message to the SC.

It should be noted that, as regards the invention, it is insignificant how the short message service support has been implemented in the mobile communication system. In the GSM system, for example, the invention is applicable to existing networks supporting short message service. An example of such a network is the GSM network of Radiolinja Oy in Finland. The mobile station may also be any kind of mobile station supporting short message service. An example is the Nokia 2110 GSM and Communicator 9000.

Regarding the invention, it is not essential how the SC is connected to the ISP server, via the Internet network or another data network or with a direct link. In all cases the procedure can be in accordance with that illustrated e.g. in Figure 4.

When using the USSD service, the service centre 10 can be implemented in a substantially similar way. In the case of the USSD the SC, however, typically connects to the GSM network via the HLR, as is illustrated by a broken line in Figure 1. Furthermore, message exchange between the HS and the SC is naturally carried out in the manner defined for the USSD.

Referring to Figure 4, the MS requests IAP settings by sending a special "request Internet access point" message, RIAP or SMS (or RIAP USSD) to the short message centre SC. In the preferred embodiment of the invention the RIAP also contains system information identifying the current IAP area of the MS. It is also possible that the SC has information on the IAP area or deduces the information itself. Then the SC requests IAP settings from the ISP server according to the protocol required by the interface between them or by the data network (IAP Request). This request may contain system information which identifies the IAP area and by means of which the ISP server selects the IAP settings suitable for the location of the mobile station. These IAP settings are transmitted to the SC in an IAP response. The SC forwards them to the MS in a special "set Internet access point " message, SIAP SMS (or SIAP USSD) to the mobile station. The MS updates the stored IAP settings with the IAP settings it receives in the SIAP SMS. The format of the SIAP SMS may be similar to the one supported by the Nokia Communicator 9000.

Referring to Figure 1, in the preferred embodiment of the invention the service centre SC is connected to the Internet network 12 so that it can be

used as a gateway between the GSM network and the Internet network. The interface between the short message service centre SC and the Internet network may be a direct interface, or the SC may be in connection with a separate computer equipment having access to the Internet network 12. Such
5 a separate equipment is illustrated by a CPU 19 in Figure 1.

In this way the SC brings the information sources of the Internet network 12 to the use of mobile subscribers via short message service. Implementation of the SC and information retrieval by means of short messages is described in greater detail in the applicant's co-pending
10 application FI963659, which is incorporated herein by reference. In general, the SC uses HTTP and HTML protocols towards the Internet network 12. The HTTP protocol again uses TCP/IP interfaces. WWW server and customer programs usable in a service centre computer (computers) SC in retrieving
15 WWW pages according to the HTTP and HTML protocols from the Internet network are commercially available for different operating systems (such as Unix). The interface 41 between the GSM network and the service centre SC may be similar to that in present short message service centres.

In the preferred embodiment of the invention such an Internet SC is utilized for retrieving IAP settings from the Internet service provider's (ISP)
20 server in the Internet network, e.g. ISP server 13 in Figure 1.

When requiring IAP settings from an Internet WWW page, the MS sends a RIAP short message addressed (ISDN number) to the service centre SC of the home network 17 (step 71, Figure 7), and the message contains an identifier for directly or indirectly indicating said WWW page. Direct indication
25 contains e.g. the WWW page address, URL. Examples of URL addresses are **http://www.nokia.com** and **http://www.uspto.gov/**. In an embodiment of the invention, instead of an URL address, the user keys in a short keyword in the short message indirectly indicating the desired WWW page. This may be e.g. the name of the ISP, such as EUNET Finland. The data base of the service
30 centre SC comprises a table for linking keywords and WWW page addresses. The RIAP SMS also includes a system identifier identifying the current IAP area of the MS.

A RIAP short message is transferred to the service centre SC as a normal MO short message, when the MS roams in another GSM network, e.g.
35 in the network 11 in Sweden, the RIAP SMS is transferred to the home network 17, and via the SMS-GW to the service centre SC. Having received

the short message, the SC retrieves on the basis of the keyword the URL address from the table. Then the SC sends an IAP request corresponding to the URL address to the ISP server, and the request contains a system identifier identifying the current IAP area of the MS. The ISP server 13 contains a list, which links IAP areas with preferred IAP settings. When the ISP server 13 receives an IAP request (step 51, Figure 5), it searches for IAP settings corresponding best to the location (IAP area) of the MS on the basis of the received system information (step 52). Then the ISP server 13 sends the selected IAP settings to the SC in an IAP response (step 53). The SC forwards the IAP settings to the MS in a SIAP short message. The MS receives the SIAP short message (step 72, Figure 7) and possibly shows the new IAP settings to the user to obtain a confirmation and/or to carrying out possible user-specific additions or changes (step 73). Then the MS updates the IAP settings (step 74).

15 In the above embodiment IAP settings were selected by an ISP server. One way of implementing said list and selection is to use WWW pages having interrogation scripts, i.e. interrogation expressions produced by means of a command language. In other words, already the WWW server maintaining WWW pages filters relevant IAP settings according to the received system information (IAP area) from the list on a WWW page and sends them to the service centre SC as a WWW page. The service centre has to know the interrogation format of each WWW page (service).

25 In the second embodiment of the invention, IAP lists are realised as WWW pages of the ISP server, but IAP settings are selected by the SC. Having received the short message, the SC retrieves the URL address from the table on the basis of the keyword (steps 61-62, Figure 6). Then the SC preferably checks if said WWW page has been retrieved previously and stored in the data base of the SC (step 63). If the data base does not include the page, the SC retrieves the WWW page corresponding to the URL address from the Internet network and stores it (step 64). The SC separates or "filters" only IAP settings relevant with respect to the current IAP area of the MS from the WWW page (step 65) and sends them to the MS in a SIAP short message (step 66).

35 Principles disclosed in the application FI963659 can be directly applied to both the embodiments described above.

One optional feature of the GSM system is short message service cell broadcast, SMS-CB. It comprises broadcasting digital information messages ("short messages") cyclically towards the MS in a certain geographic area. According to the present GSM recommendations, short message service cell broadcasts are not encrypted or provided with an address, and hence any MS designed for this service can receive and decode them. The recommendations do not, however, define who produces these messages for the network and how they are produced. A classical example of the use of cell broadcast is road traffic information.

10 In the second embodiment of the invention, preferred cell broadcast is used for updating IAP settings in steps 26 and 34 (Figures 2 and 3). The short message service centre or another application is reserved for this purpose, e.g. in Figure 1 the service centre SC provides cell broadcast messages containing preferred IAP settings of a certain IAP area. The format
15 of short message contents may be similar to that of the above-mentioned SIAP message. Short messages are broadcast in every cell within said IAP area. In other IAP areas different IAP settings are broadcast. All mobile stations, which are within the IAP area and support the SMS-CB, receive the short messages (step 81, Figure 8) and may update IAP settings, if necessary
20 (step 83). The MS may also show new IAP settings to the user and ask for confirmation (step 82). In the preferred embodiment of the invention the MS allows updating of IAP settings only when the IAP area changes. The mobile station could update IAP settings each time it receives a short message service cell broadcast, but this is not a very practical alternative. In updating
25 based on the SMS-CB a separate retrieval procedure of IAP settings is avoided. On the other hand, the number of messages sent is considerable, which loads both the network and mobile stations. However, all networks and mobile stations probably do not support the SMS-CB, which may limit the scope of IAP roaming according to the invention.

30 In one embodiment of the invention, the subscriber may have subscriber-specific additional settings defined in server 13. In that case, the subscriber's MSISDN, on the basis of which the ISP server can send back the IAP settings tailored for the subscriber, can also be transferred to the server in a RIAP request.

The invention has been described above by means of preferred embodiments. The invention is, however, not limited to the solutions disclosed, but may be modified within the scope and spirit of the appended claims.

CLAIMS

1. A method of updating Internet access point information in the terminal equipment of a digital mobile communication system, which is capable of establishing a connection to the Internet via the mobile communication system and a number of Internet access points, **characterized** in that it comprises the steps of
- storing settings of Internet access points that were used last time to access the Internet in the terminal equipment,
- storing system information in the terminal equipment on the mobile communication network or on part of the mobile communication network used to access the Internet last time,
- receiving broadcast system information on the mobile communication network or on part of the mobile communication network in the current location of the terminal equipment,
- comparing said received system information with said stored system information,
- starting a procedure for updating the stored Internet access point settings of the terminal equipment with Internet access point settings recommended for the currently used mobile communication network or for part of the mobile communication network, if it is noted on the basis of said stored and received system information that the mobile communication network or part of the mobile communication network has changed.
2. A method as claimed in claim 1, **characterized** by steps of
- carrying out said comparison only when a new Internet transaction is started, and
- carrying out said updating procedure before setting up a call to the Internet access point via the mobile communication system, if it is noted on the basis of said stored and received system information that the mobile communication network or part of the mobile communication network has changed.
3. A method as claimed in claim 1 or 2, **characterized** in that said updating procedure comprises the steps of
- requesting Internet access point settings from the Internet service provider's server via the mobile communication system, said request

comprising system information identifying the current mobile communication system of the terminal equipment or part of the mobile communication system,
receiving said request at said server

5 selecting in said server on the basis of system information included in said request Internet access point settings suitable for the current location of the terminal equipment,

sending selected settings from said server via the mobile communication network to the terminal equipment,

10 receiving selected settings in the terminal equipment,
updating Internet access point settings of the terminal equipment with said selected settings.

4. A method as claimed in claim 1, 2 or 3, **characterized** in that said updating procedure comprises the steps of

15 sending a message requesting Internet access point settings to a message service centre, which has an access to the Internet network, said message comprising system information identifying the current mobile communication network of the terminal equipment or part of the mobile communication network,

20 receiving said message in said message centre,
sending a request for Internet access point settings from the message centre to the Internet service provider's server by using protocols of the Internet network, said request comprising system information identifying the current mobile communication network of the terminal equipment or part of the mobile communication network,

25 receiving said request in said server,
selecting in said server on the basis of system information included in said request Internet access point settings suitable for the current location of the terminal equipment,

30 sending a response including the selected settings from said server to the message service centre by using protocols of the Internet network,
receiving said message in the terminal equipment,
updating Internet access point settings of the terminal equipment with said selected settings.

5. A method as claimed in claim 1, 2 or 3, **characterized** in
35 that said updating procedure comprises the steps of

5 sending a message requesting Internet access point settings to a message service centre, which has an access to the Internet network, said message comprising system information identifying the current mobile communication network of the terminal equipment or part of the mobile communication network,

receiving said message in said short message service centre,
retrieving the World Wide Web (WWW) page including Internet access point settings from the Internet network by using protocols of the Internet network as a response to said message sent by the mobile station,
10 selecting Internet access point settings suitable for the location of the mobile station from the received WWW page on the basis of said system information,

sending a message including said selected settings from the message service centre to the terminal equipment,
15 receiving said message in the terminal equipment,
updating Internet access point settings of the terminal equipment with said selected settings.

6. A method as claimed in claim 1 or 2, **characterized** by steps of
20 broadcasting messages including information on settings of the recommended Internet access point to all terminal equipment of the mobile communication network or part of it,

updating stored Internet access point settings of the terminal equipment with Internet access point settings included in said broadcast
25 message, if it is noted on the basis of stored and received system information that the mobile communication network or part of the mobile communication network has changed.

7. A method as claimed in any one of the preceding claims, **characterized** in that said system information is one of the following:
30 country code, operator name, operator code, network name, network code, location area identifier.

8. A server in the Internet network, **characterized** in that the server comprises
means (51) for receiving a request for Internet access point settings
35 via the Internet network from a message centre (SC), which is connected to a mobile communication network (11), said request comprising information

identifying the mobile communication network or part of the mobile communication network, where the mobile station (MS) which requested settings is located,

means (52) for selecting settings of the Internet access point
5 suitable for the location of the mobile station on the basis of system information included in said request,

means (53) for sending selected settings via the Internet network to said message centre (SC) to be forwarded to the mobile station (MS).

9. A message service centre for a digital mobile communication
10 system, including a message service, e.g. a short message service centre (SC) comprising

first means (61, 66) for connecting to a mobile communication network (11) in order to transmit messages between the short message service centre (SC) and a mobile station (MS), and

15 second means (64) for connecting to a data network (12),
characterized in that

said second means (64) comprise means for retrieving settings of an Internet access point suitable for a current location of a mobile station (MS) from an Internet service provider's server (13) from the data network (12) in
20 response to a message (RIAP SMS) sent by the mobile station, the message requesting Internet access point settings, and that

the message service centre (SC) also comprises means (66) for sending Internet access point settings received from the server (13) in a message (SIAP SMS) via the mobile communication network to the mobile
25 station (MS).

10. A short message service centre as claimed in claim 9,
characterized in that the message (RIAP SMS) sent by the mobile station (MS) contains system information identifying the mobile communication network or part of the mobile communication network where the mobile station
30 is currently located.

11. A short message service centre as claimed in claim 9 or 10,
characterized in that

said data network is the Internet network (12),

said second means comprise means (64) for retrieving said Internet
35 access points from the Internet server in response to the message (RIAP SMS) sent by the mobile station (MS).

12. A short message service centre as claimed in claim 11, **characterized** in that

said second means comprise means (64) for retrieving the World Wide Web (WWW) page including Internet access point settings from the Internet network (12) by using protocols of the Internet network in response to
5 said message (RIAP SMS) sent by the mobile station (MS),

the message service centre also comprises means (65) for separating settings of the Internet access point suitable for the location of the mobile station (MS) from the received WWW page on the basis of the location
10 of the mobile station, and means (66) for sending the separated settings to the mobile station (MS) in a message (SIAP SMS).

13. Terminal equipment of a digital mobile communication system, which is capable of establishing a connection to the Internet network (12) via a mobile communication system (11, 17) and a number of Internet access points
15 (14, 16), and which comprises a memory in which Internet access point settings used last time to access the Internet are stored, **characterized** in that the terminal equipment (MS) comprises

a memory in which system information identifying the mobile communication network or part of the mobile communication network used last
20 time to access the Internet is stored,

means (22, 31) for receiving broadcast system information on the mobile communication network or part of the mobile communication network of the current location of the terminal equipment,

means (23, 24; 32, 33) for comparing said received system
25 information with said stored system information,

updating means (26, 34) for starting the procedure for updating stored Internet access point settings of the terminal equipment (MS) with settings of the Internet access point recommended for the currently used mobile communication network or for part of the mobile communication
30 network, if it is noted on the basis of the stored and received system information that the mobile communication network or part of the mobile communication network has changed.

14. Terminal equipment as claimed in claim 13, **characterized** in that

said means (23, 24) of comparison start in response to initiation
35 (21) of a new Internet transaction, and

said updating means (26) are responsive to said means (23, 24) of comparison to carry out said updating procedure before setting up (27) a call via the mobile communication system to an Internet access point, if it is noted on the basis of said stored and received information that the mobile communication network or part of the mobile communication network has changed.

15 15. Terminal equipment as claimed in claim 13 or 14, **characterized** in that said updating means (26, 34) comprise means for requesting Internet access point settings from the Internet service provider's server via the Internet, said request (RIAP SMS) comprising system information identifying the current mobile communication network or part of the mobile communication network of the terminal equipment,

15 means for receiving a response (SIAP SMS) including requested settings from the server via the mobile communication system, and for updating Internet access point settings of the terminal equipment with the received settings.

20 16. Terminal equipment as claimed in claim 13, 14 or 15, **characterized** in that said updating means comprise means for sending a short message (SIAP SMS) requesting Internet access point settings to the message service centre (SC), which has an access to the Internet network (12), said message containing system information identifying the current mobile communication network or part of the mobile communication network of the terminal equipment,

25 means for receiving a message (SIAP SMS) containing the requested settings from the message centre, and for updating Internet access point settings of the terminal equipment with the received settings.

30 17. Terminal equipment as claimed in claim 13 or 14, **characterized** in that the terminal equipment comprises

means for receiving broadcast messages containing information on the settings of the recommended Internet access point, and that

said updating means are responsive to means (23, 24, 32, 33) of comparison for updating stored Internet access point settings of the terminal equipment with Internet access point settings included in said broadcast message, if it is noted on the basis of the stored and received system information that the mobile communication network or part of it has changed.

18. Terminal equipment as claimed in any one of claims 13-17, **characterized** in that said system information is one of the following: country code, operator's name, operator code, name of the network, network code, location area identifier.

- 5 19. A digital mobile communication system comprising message service and terminal equipment (MS) capable of establishing a connection to the Internet network (12) via a mobile communication system (11, 17) and a number of Internet access points (14, 16), **characterized** in that the mobile communication system is arranged to broadcast to terminal equipment
- 10 (MS) messages including settings of at least one local Internet access point, which is recommended to be used in part of the mobile communication system in question.

1/3

Fig. 1


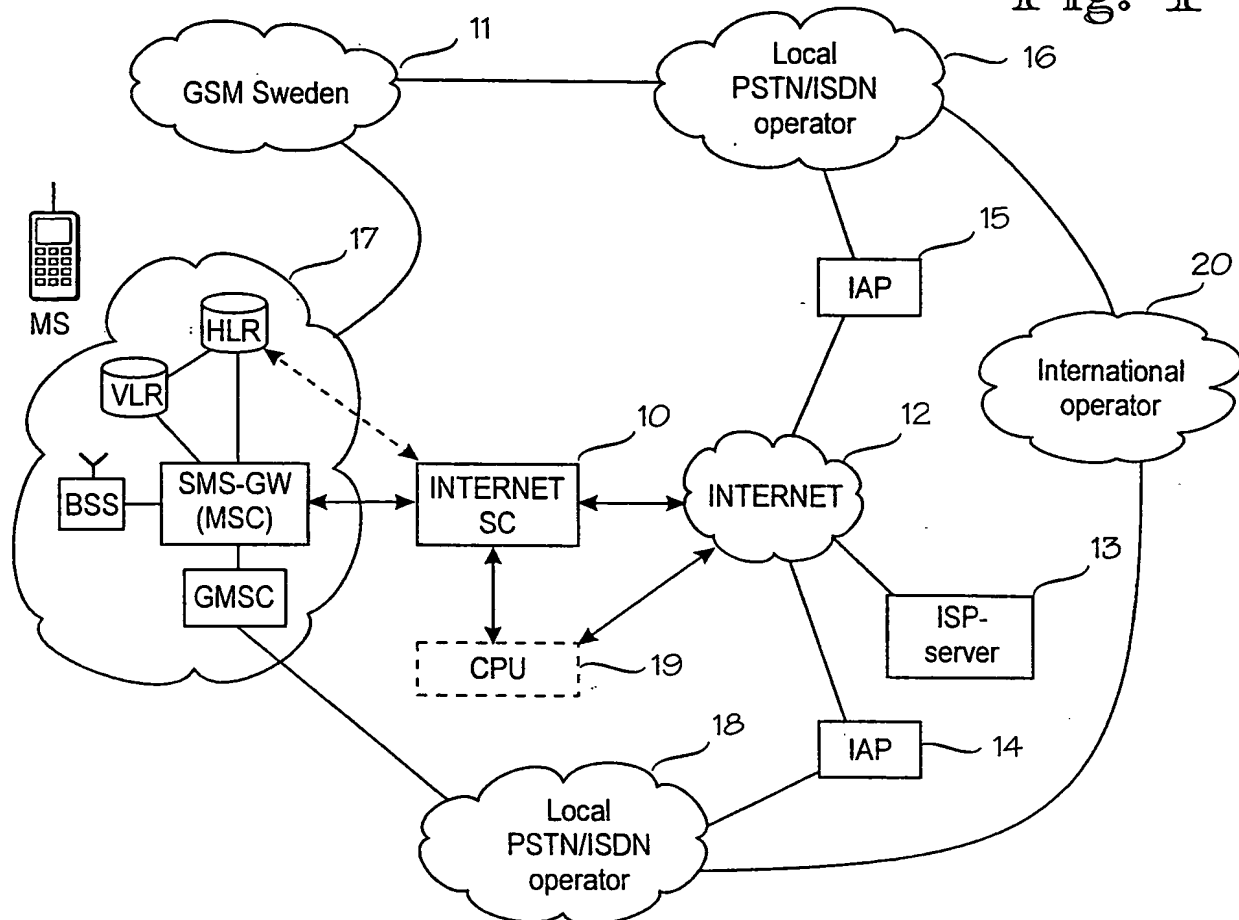


Fig. 3

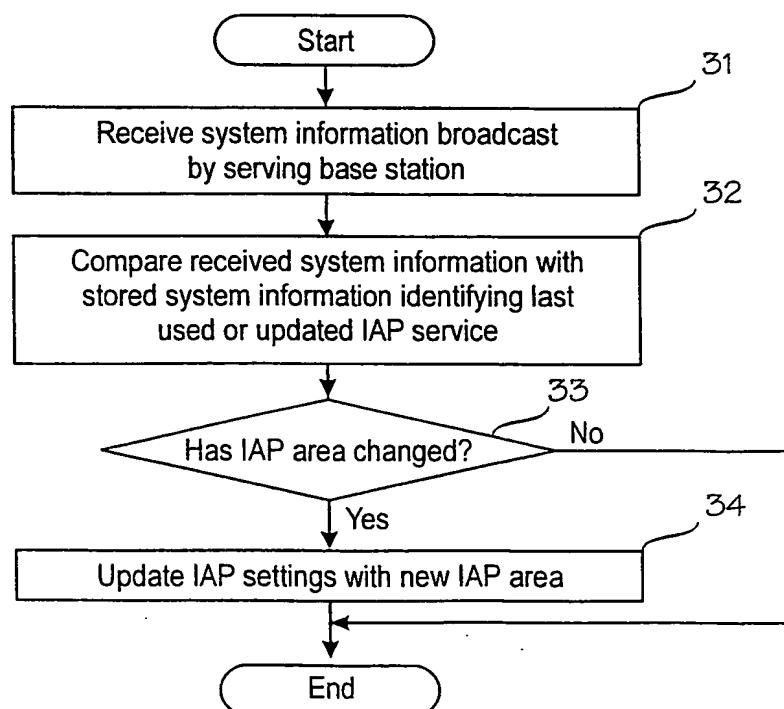

2/3

Fig. 2

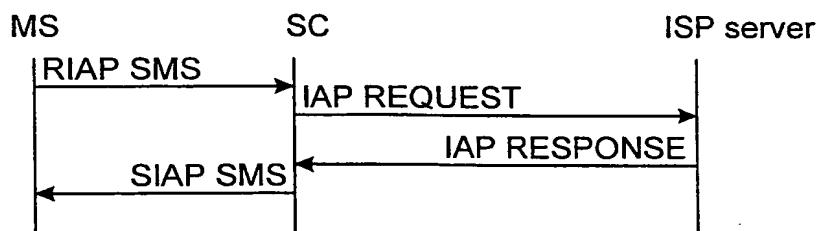
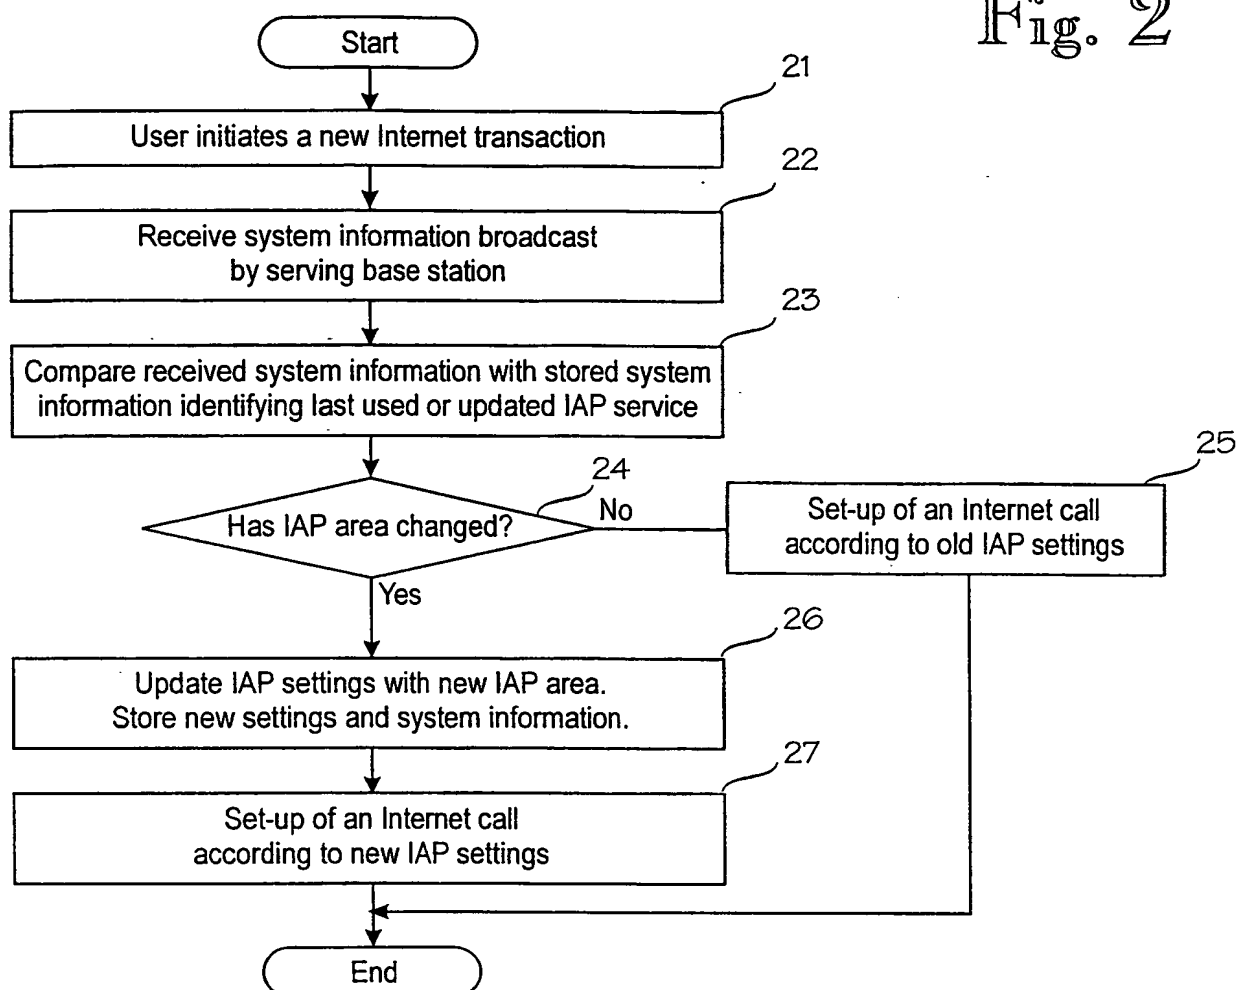


Fig. 4

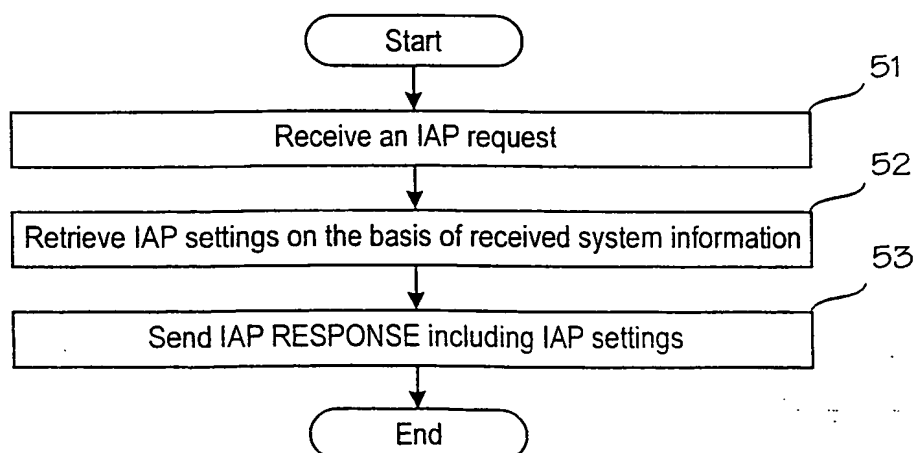


Fig. 5

3/3

Fig. 6

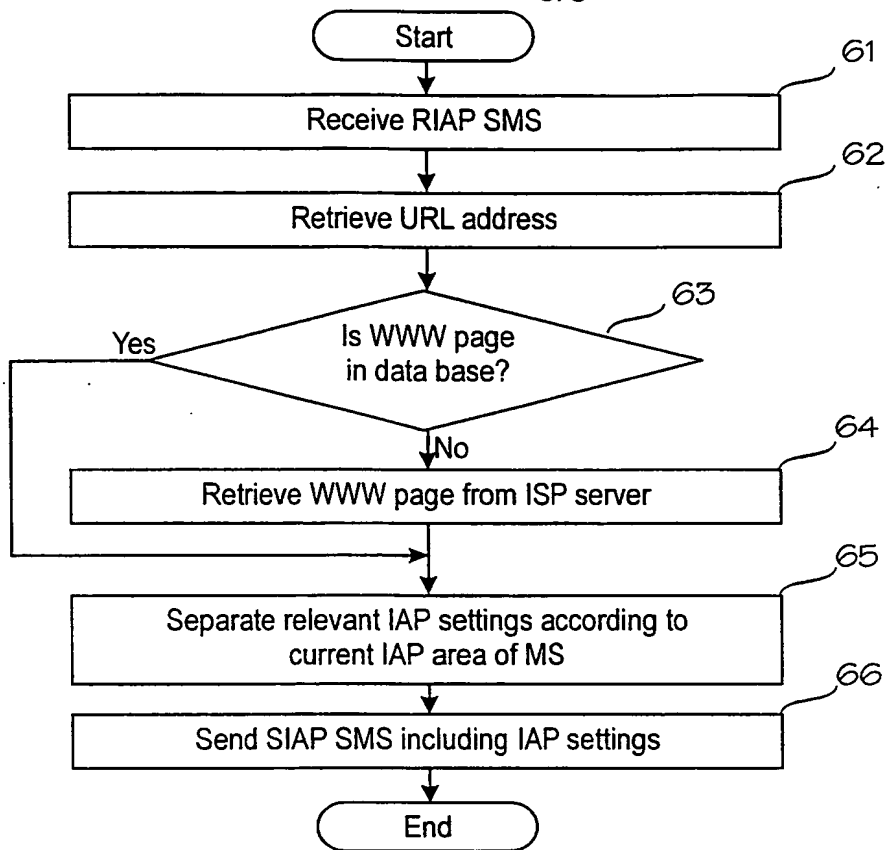


Fig. 7

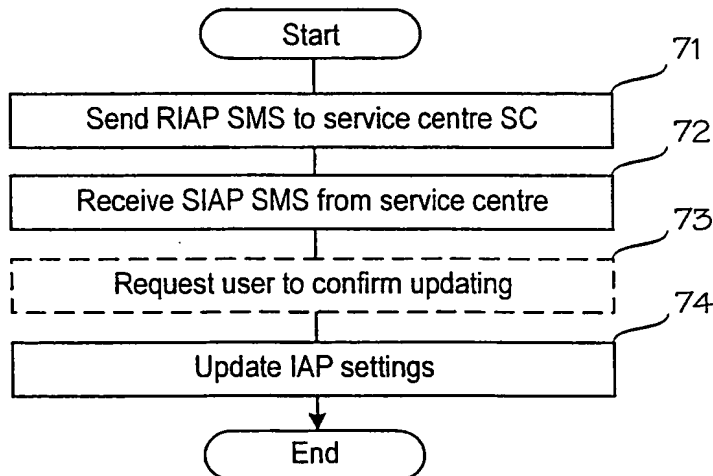


Fig. 8

